

	BFLT				
Model	1735	1945	2155	2365	2575
Rotor width [m]	1,33	1,54	1,75	1,96	2,17
Total width [m]	1,73	1,94	2,15	2,36	2,57
Maximum working depth [cm]	5	5	5	5	5
Number of belts	1 x 5 XPB	1 x 5 XPB	1 x 6 XPB	1 x 6 XPB	1 x 6 XPB
Minimum power [hp]	70	80	90	100	110
Maximum power [hp]	110	110	130	130	160
Number of hammers with rotor T60	24	28	32	36	40
Approximate weight [kg]	1 280	1 390	1 460	1 570	1 680



FRANCE

BUGNOT 52
Rue de la Batterie • F-52270 Roches Bettaincourt
Tél. [+33] 3 25 01 31 18 • Fax [+33] 3 25 01 37 47
e-mail : info@bugnot.com

www.bugnot.com

GERMANY

BUGNOT Zweigniederlassung
Braunsroda 46 • D-06647 AN DER POSTSTRASSE
Tél. [+49] 034467404065 • Fax [+49] 034467404066
e-mail : bugnot@web.de



BFLT

**TO GRIND,
TO SHRED,
TO MULCH...**



- Simple driveline
- Heavy duty secure locking of the hammers
- Ability to crush stones
- Grinding chamber fitted with counter knife shearbars
- Fixed forestry rake (hydraulic actuated optional)
- Optional forestry claws on rake
- Hydraulic rear door
- Double row oscillating bearings on rotor identical to our stone crushers
- Adjustable skids (3 positions : -2,5/0/+2,5 cm)



1000 rpm (optional 540 rpm)


ROTORS DESIGNED AND TESTED WITH AND FOR YOU
 SECURE LOCATING AND LOCKING OF THE HAMMERS
 EASY AND QUICK CHANGE OF THE WEARING PARTS



Belts XPB

Remote greasing
of the bearings
is done externally

Adjustable skids
[3 positions]

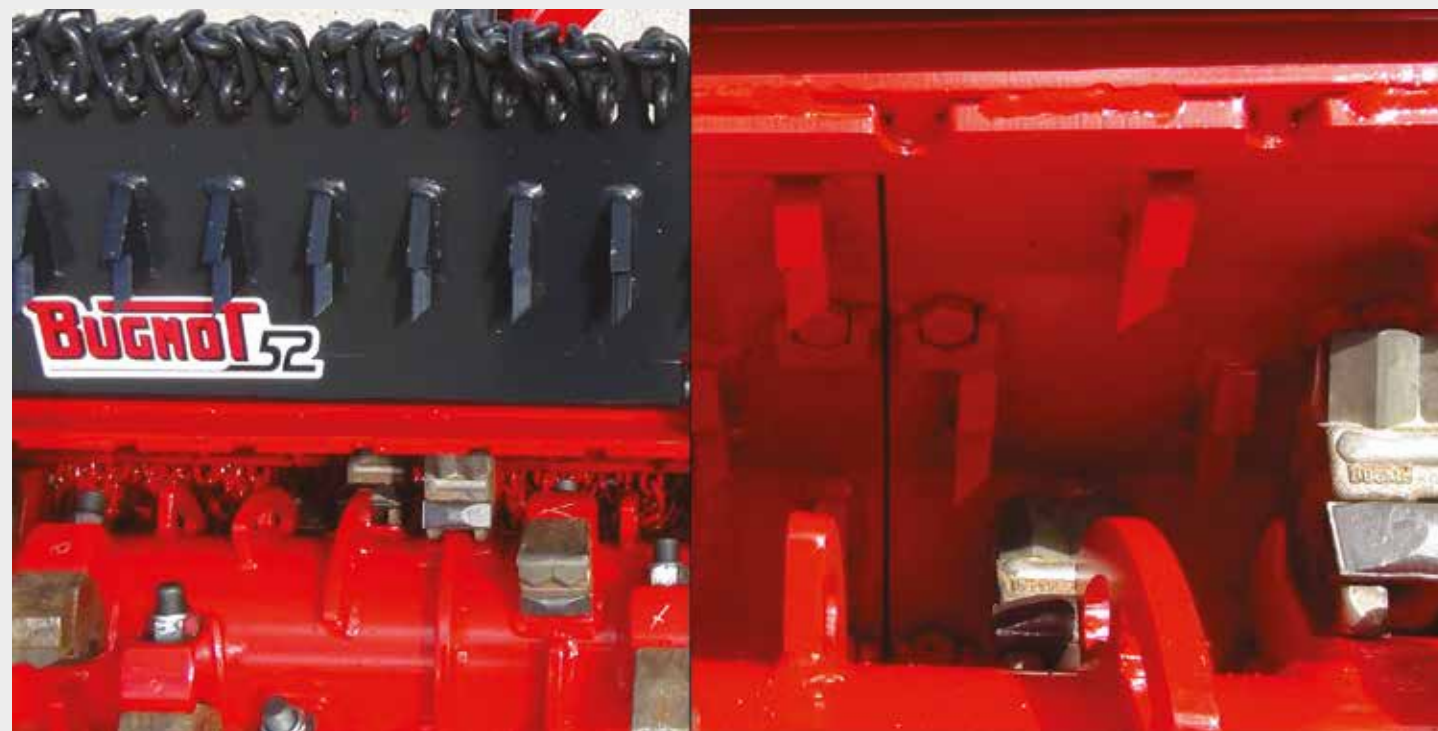

For an optimum grinding, the mulcher is fitted with counter knife shearbars at the front and above the rotor as well as on the hydraulically operated rear door

ROTOR T 60			
<p>2 spirals</p>	For wood and stones		Use in wood condition and over ground
	Type SP1 Big	Type SP2	Cutting hammers



Adjustment of the belt tension by moving the gearbox and its extension

ROTOR T 60 S3				
<p>3 spirals</p>	For wood and stones		For stumps and stones	
	Type SP1 Big	Type SP2	Type SP1 D	Type SP1 G
				Cutting hammers